

F2SSR

FLUORESCENT INDUSTRIAL STRIP

2 or 4 Lamps



DESCRIPTION

Stanpro's F2SSR is ideally suited for warehouses, aisles and a variety of industrial applications where uniform and efficient lighting is required. The mounting of the F2SSR can either be surface or suspended and available in 96 inches using T5, T5HO or T8 lamps. The F2SSR comes complete with a solid reflector or optional up-light apertures.

POWER RANGE

- 32W T8 lamp
- 28W T5 lamp
- 54W T5HO lamp

HOUSING & FINISHING

The shallow body is made of die-formed cold rolled steel, post-painted high-gloss white.

BALLAST

T5 & T5HO: Our fixtures come standard with electronic **program start** ballasts.

T8: Our fixtures come standard with electronic **instant start** ballasts (not intended for use with occupancy sensors).

Dimming ballasts and other ballast types are optional.

REFLECTOR

Standard solid reflectors provide 95% efficiency. The optional slotted reflectors provide 95% efficiency and 10% uplight.


WIREGUARD

11 gauge white metal wireguards (to protect the fixtures from impact and breakage) are sold separately.


DIMENSIONS

Cross Section View


2 Lamps



Side View (no reflector)



Base View (no reflector)

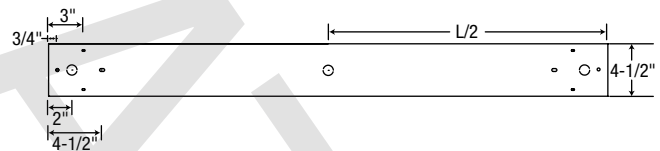

Accessories (order separately)

WGD056-48	White wireguard 48" need 2 for the 96" size
HAR766	V Hooks (2 pieces per fixture)
HAR728	Continuous row reflector aligner clips for surface installation (order 2 pcs)
BKT347	3 ft set of chains (set of 2)

ORDERING GUIDE

Series	Size	Nbr of lamps	Lamp type	Wattage	Operation	Voltage	Options
F2SSR	96 - 96"	2 - 2 lamps 4 - 4 lamps	T8	32 - 32W	Blank - AC only DL1 - Dual AC & emergency back-up 1 lamp DL2 - Dual AC & emergency back-up 2 lamps	A - 120V H - 347V W - 120-277V	DIM1 - 0-10VDC dimming ballast 120V, 120-277V (347V available for T8 lamps only) DIM2 - Line voltage dimming, ballast 120V, 120-277V DALI1 - Digital addressable lighting interface driver (Not available in 347V) LBF - Low ballast factor <0.85 (T8 only) HBF - High ballast factor >1.0 (T8 only) PSP - Program start parallel ballast FRZ* - Low ambient starting temperature (-29°C) APT - Reflector with apertures OS** - Occupancy sensor
			T5	28 - 28W			
			T5HO	54 - 54W			

* Not available with Program Start T8 ballasts.

** To see available options, please consult the occupancy sensors section

NOTE: Due to the fact that not all lamp/ballast combinations are compatible, please consult factory.

*** Please consult the liquidation page for applicable configurations**