

L3BRA

LED RECESSED "BASKET"

2'x2', 2'x4'



Approvals:

CSA Certified to C22.2 #250



DESCRIPTION

Low profile construction dedicated to LED is ideal for shallow plenum spaces. Specification grade, direct/indirect center diffuser luminaire provides smooth and uniform ambient lighting for all commercial and industrial buildings with recessed configurations. Reflected light from matte surfaces provide a softened "sky light" appearance to the modern office environment.

HOUSING & FINISHING

Housing is die-formed and embossed. Luminaire body finish is high reflectance baked white enamel with matte white reflector. Wiring knockouts are provided on the back of housing.

MOUNTING

Recessed inverted T-Bar ceilings. Grid mount. Comes complete with integrated earthquake clips.



ELECTRICAL

120-277V or 347V electronic driver with 0-10V dimming is standard. Long-life LED's that provide 80+ CRI are available in 3500K, 4000K and 5000K. Estimated lifespan of over 50,000 hours to L70.

LENS

Opal linear lens diffuser.

DIMENSIONS

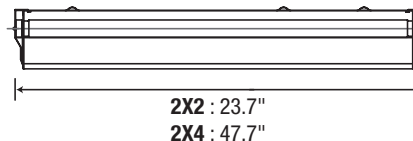

Accessories (order separately)

PF-DWK-2X2 Dry wall kit for 2'x2'

PF-DWK-2X4 Dry wall kit for 2'x4'

Lumen Output

	3500K	4000K	5000K
2X2 S1	3738 lm	3813 lm	3883 lm
2X4 S1	4046 lm	4127 lm	4203 lm
2X4 S2	5595 lm	5707 lm	5813 lm
2X4 S3	7497 lm	7647 lm	7789 lm

ORDERING GUIDE

L3BRA — L — / /						
Series	Size	Lamp type	Lumen package delivered*	Voltage	Color temperature	Options
L3BRA	2 - 2'x2'	L - LED	S1 - 3738 lumens (40W)	A - 120V	35K - 3500K	DIM2** - Line voltage dimming, driver 120V DALI1 - Digital adressable lighting interface driver EM - Emergency backup (from 0°C - 25°C) 120-277V only
	4 - 2'x4'		S1 - 4046 lumens (40W)	H - 347V	40K - 4000K	
			S2 - 5595 lumens (54W)	W - 120-277V	50K - 5000K	
			S3 - 7497 lumens (75W)			

* CCT 3500K. See lumen output table for other lumen packages.

** Not available for the S3 version.



DLC (Design-Lights Consortium®) qualified products. Please visit www.designlights.org/QPL to verify the latest update of the DLC Qualified Products List and validate which ones are qualified. Some restrictions may apply.