

UNISIO

FIXED RECESSED LUMINAIRE



Approvals:
CSA Certified to C22.2 #250

REGGIANI
WE SPEAK LIGHT

DESCRIPTION

Unisio is a fixed recessed luminaire that offers exceptional visual comfort, making it ideal for general lighting. Unisio can be used in all interior lighting applications ranging from small spaces like boutiques and homes to larger spaces with very high ceilings such as hotels, museums, showrooms, shopping centers, train stations and airports.

LAMP/BALLAST

Lamp 39W - 70W G12
Ballast 120V electronic ballast

MATERIAL


Die-cast aluminum. Reflector is made of 99.9% pure matte anodized aluminum.

HOUSING

Non-IC open housing

For new construction only. Requires 3" clearance from any insulation. Include hanger bars expandable to 24".

DIMENSIONS

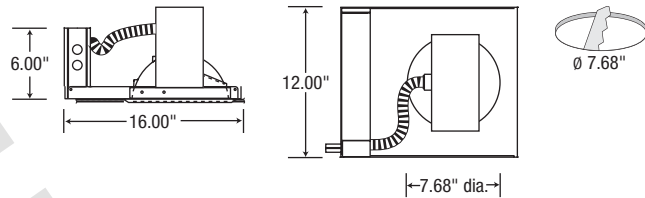

PHOTOMETRIC DATA

39W	NR	MD	WD	MR
	39W 14° (η)0.90	39W 22° (η)0.85	39W 50° (η)0.85	39W (η)0.82
	FC Ø	FC Ø	FC Ø	FC 0°-180° 90°-270°
4 ft	1858 1.00	4 ft 815 1.56	4 ft 216 3.76	4 ft 289 0.80 6.60
6 ft	826 1.49	6 ft 362 2.33	6 ft 96 5.63	6 ft 128 1.19 9.89
8 ft	464 2.00	8 ft 204 3.11	8 ft 54 7.51	8 ft 72 1.60 13.19
10 ft	297 2.50	10 ft 130 3.90	10 ft 34 9.40	10 ft 46 2.00 16.50
12 ft	206 3.00	12 ft 90 4.67	12 ft 24 11.27	12 ft 32 2.40 19.79
14 ft	151 3.50	14 ft 66 5.46	14 ft 17 13.15	14 ft 23 2.80 23.09

70W	NR	MD	WD	MR
	70W 14° (η)0.81	70W 22° (η)0.80	70W 50° (η)0.81	70W (η)0.83
	FC Ø	FC Ø	FC Ø	FC 0°-180° 90°-270°
4 ft	2736 1.00	4 ft 1329 1.60	4 ft 405 3.72	4 ft 555 0.76 6.64
6 ft	1217 1.49	6 ft 591 2.39	6 ft 180 5.57	6 ft 247 1.14 9.95
8 ft	684 2.00	8 ft 332 3.19	8 ft 101 7.43	8 ft 139 1.52 13.27
10 ft	437 2.50	10 ft 212 4.00	10 ft 64 9.30	10 ft 88 1.90 16.60
12 ft	304 3.00	12 ft 147 4.79	12 ft 45 11.15	12 ft 61 2.28 19.91
14 ft	223 3.50	14 ft 108 5.60	14 ft 33 13.01	14 ft 45 2.66 23.23

ORDERING GUIDE

Trim (order separately)	Lamp type	Wattage	Voltage	Color	IOS reflector	Options
REG13464	G - G12	0039 - 39W 0070 - 70W	A - 120V	WH - White MG - Metallic grey	11310 - Narrow beam 11311 - Medium beam 11312 - Wide beam 11313 - Mira	NL - No lamps

Housing (order separately)	Lamp type	Wattage	Voltage
REG13464-H	G - G12	0039 - 39W 0070 - 70W	A - 120V

* Please consult the liquidation page for applicable configurations