

# Varios

## CMH TRACK HEAD



**Approvals:**  
cCSAus Certified to C22.2 #250



### DESCRIPTION

The Varios is an aluminum track mount, adjustable projector. The whole luminaire has optimum aesthetic balance of the volumes for a result of keeping the control gear and lighting body separate to favour the best heat dissipation.

### LAMP/BALLAST

**Lamp:** 20W - 39W - 70W G12  
**Ballast:** 120V electronic ballast


### MATERIAL

Die cast aluminum, with integral anti-glare shield, compact base.

### SPECIFICATIONS

**Luminaire:** Trackhead + IOS reflector  
**Adjustable:** Horizontal 356°, vertical ± 90°

### DIMENSIONS

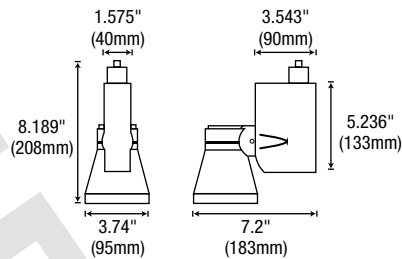

### PHOTOMETRIC DATA

20W	NR	MD	WD	MR
	20W 14° (η)0.76	20W 24° (η)0.74	20W 78° (η)0.71	20W (η)0.65
	FC Ø	FC Ø	FC Ø	FC 0°-180° 90°-270°
4 ft	765 0.88	4 ft 284 1.64	4 ft 36 6.08	4 ft 114 0.72 4.28
6 ft	340 1.31	6 ft 126 2.45	6 ft 16 9.11	6 ft 51 1.08 6.42
8 ft	191 1.76	8 ft 71 3.27	8 ft 9 12.15	8 ft 28 1.44 8.56
10 ft	122 2.20	10 ft 45 4.10	10 ft 5 15.20	10 ft 18 1.80 10.70
12 ft	85 2.64	12 ft 31 4.91	12 ft 4 18.23	12 ft 12 2.16 12.84
14 ft	62 3.08	14 ft 23 5.74	14 ft 2 21.27	14 ft 9 2.52 14.98

39W	NR	MD	WD	MR
	39W 12° (η)0.76	39W 22° (η)0.76	39W 74° (η)0.71	39W (η)0.62
	FC Ø	FC Ø	FC Ø	FC 0°-180° 90°-270°
4 ft	1634 0.88	4 ft 613 1.64	4 ft 75 6.08	4 ft 172 1.04 4.72
6 ft	727 1.31	6 ft 272 2.45	6 ft 33 9.11	6 ft 76 1.56 7.08
8 ft	408 1.76	8 ft 153 3.27	8 ft 18 12.15	8 ft 43 2.08 9.44
10 ft	261 2.20	10 ft 98 4.10	10 ft 12 15.20	10 ft 27 2.60 11.80
12 ft	181 2.64	12 ft 68 4.91	12 ft 8 18.23	12 ft 19 3.12 14.16
14 ft	133 3.08	14 ft 50 5.74	14 ft 6 21.27	14 ft 14 3.64 16.52

70W	NR	MD	WD	MR
	70W 14° (η)0.76	70W 24° (η)0.72	70W 78° (η)0.77	70W (η)0.63
	FC Ø	FC Ø	FC Ø	FC 0°-180° 90°-270°
4 ft	2070 1.04	4 ft 915 1.72	4 ft 162 6.48	4 ft 338 0.92 4.88
6 ft	920 1.55	6 ft 407 2.57	6 ft 72 9.71	6 ft 150 1.38 7.32
8 ft	517 2.08	8 ft 228 3.43	8 ft 40 12.95	8 ft 84 1.84 9.76
10 ft	331 2.60	10 ft 146 4.30	10 ft 26 16.20	10 ft 54 2.30 12.20
12 ft	230 3.11	12 ft 101 5.15	12 ft 18 19.43	12 ft 37 2.76 14.64
14 ft	169 3.64	14 ft 74 6.02	14 ft 13 22.67	14 ft 27 3.22 17.08

### ORDERING GUIDE

Series	Lamp type	Wattage	Voltage	Adapter	Colour	IOS reflector	Options
REG15630	G - G12	0020 - 20W 0039 - 39W 0070 - 70W	A - 120V	J - J track H - H track H2 - H track 2 circuit L - L track	WH - White BK - Black MG - Metallic grey	11305 - Narrow beam 11306 - Medium beam (standard) 11307 - Wide beam 11308 - Mira	NL - No lamp

Accessorie (order separately)

REG14505 Anti-glare louver



\* Please consult the liquidation page for applicable configurations