

## WPS-L GEN 3

### WALL PACK

This wall pack series is a classic and familiar design integrated with modern LED technology to promote better energy efficiency and long life. It is best suited for entrances, underpasses or anywhere controlled security lighting is required, the series luminaire is a great addition to any commercial or industrial outdoor wall mount application. The tough die cast aluminum housing is moisture and dustproof. It comes standard with a prismatic glass lens.

#### FEATURES AND SPECIFICATIONS

##### • Construction

###### Housing

Aluminum die cast housing and is standard with a bronze powder coat finish.

###### Lens

Prismatic glass lens is standard in this product series.

##### • Compliances

- Wet location
- IP65, IP66
- Meets requirements of ICES-005 issue 5 for class B products
- cETLus
- cULus

##### • Electrical

The LED drivers allow input of 347 V with the following onboard surge protection:

- **C2:** 1 kV standard for 347 V
- This wall pack series is suitable for ambient temperature range of -40 to 40 °C. Available in 4 000 and 5 000 K color temperatures with a lumen per watt ratio of 110 to 112 lm/W depending on the lumen package.
- This fixture can replace up to a 400 W metal halide equivalent.



#### OVERVIEW

Light source	LED
Watts (W)	40
Lumen output (lm)	4 400 - 4 480
Efficacy (lm/W)	110 - 112
Color temperature (K)	4 000, 5 000
CRI	70



quick  
ship



LED  
fixture



dimmable



wet  
location



ICES  
005



Intertek

**QUICK SHIP AND TECHNICAL SPECIFICATION TABLE** 🕒<sup>1</sup>

Order code	Watts	Volts	Color temp.	Lumen output	Efficacy	CRI	Life L70	Tested hours	LED current	Power factor	THD	Traditionnal equivalent (W)		Case qty
	(W)	(V)	(K) <sup>2</sup>	(lm) <sup>3</sup>	(lm/W)		(hrs) <sup>4</sup>	LM-80 (hrs) <sup>4</sup>	(mA)		(%)	MH	HPS	(master)
WPS-LC22	40	347	4 000	4 400	110	70	>54 000	9 000	77	0.87	17	150	150	1
WPS-LC22-50K	40	347	5 000	4 480	112	70	>54 000	9 000	77	0.87	17	150	150	1

<sup>1</sup> **QUICK SHIP:** Product availability is subject to change without notice. Please contact your Stanpro customer service representative to confirm inventory levels at time of order.

<sup>2</sup> Typical color temperature range: +/- 5 %.

<sup>3</sup> Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %.

<sup>4</sup> Life hours are derived from IESNA LM-80-08 testing report and projected per IESNA TM-21-11 extrapolations.


**ORDERING GUIDE**

Series	Lamp type	Lumen package (W)	Volts (V)	Color temp. (K)	Color	Options
WPS	L - LED	C2 - 40	H - 347	40K - 4 000 50K - 5 000	Blank - Bronze (standard) BK - Black WH - White SP - Special color	P120 - 120 V Photocell P277 - 277 V Photocell P347 - 347 V Photocell KV - 10 kV surge

**ACCESSORY (order separately)**

Part number	Type
WGD022	Wireguard

**DIMENSIONS**

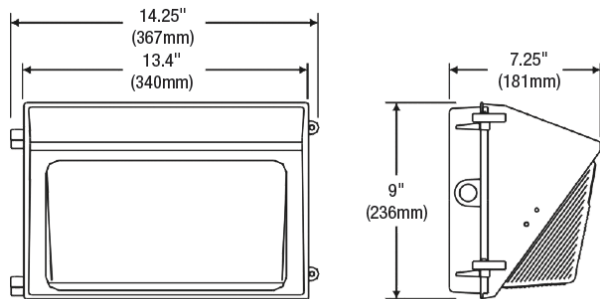

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice.