

# REC4-6

## 4" MR16 HOUSINGS

**Approvals:**  
 cCSAus Certified  
 Suitable for damp locations.



### HOUSINGS

#### DESCRIPTION

##### REC4-6

4" aperture frame-in kit for low voltage or LED MR16 lamps. Designed for use in non-insulated (REC4-6) ceiling applications for general and task lighting.

##### REC4R-6

4" aperture remodeler for low voltage or LED MR16 lamps. Designed to permit wiring from below the ceiling line in non-insulated ceiling applications for general and task lighting.

#### FEATURES

Housing constructed of heavy duty galvanized steel equipped with "quick connect" wire connectors which allow easy and rapid connection of the fixture to the main power supply. Vertically adjustable to accommodate up to a 1-1/4" ceiling thickness.

Designed for low voltage or LED MR16 lamps (magnetic transformer). Max. 50W.

*Please verify lamp manufacturer dimmer compatibility chart if installed on a dimming system.*

#### SPECIFICATIONS

**Socket:** GU5.3.

**Junction Box:** Listed for through branch circuit wiring. Built-in thermal protection.

**Hanger bars\*\*:** Pre-installed hanger bars adjustable from 13" to 26" span with built-in spike and T-bar clips.


**Screw-in mounting system\*\*:** Self-positioning screw in mounting system allows for secure installation. The screws are positioned in an angle to assure ease of service.

**Ceiling Cut-out:** 4-1/4"

\* Available only for REC4-6.  
 \*\* Available only for REC4R-6.


#### REC4-6

Non-IC Frame-in Kit

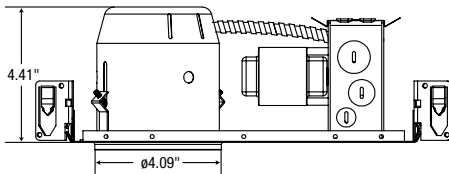

#### REC4R-6

Non-IC Remodeler

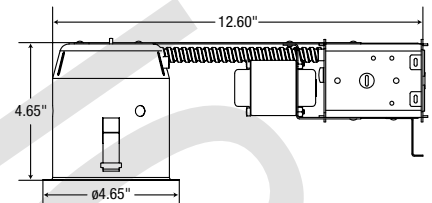

#### ORDERING GUIDE

Housing	Lamp type	Wattage	Voltage
REC4	6 - MR16	0050 - 50W	A - 120V
REC4R			

\* Please consult the liquidation page for applicable configurations